



ALFRA HYDRAULIC HAND PRESSING UNIT – 10 - 300 mm²

C-Form for easy handling

- C-form, pressing head **320° rotatable**, hydraulics is integrated in the hand grip. Automatic switch over from quick feed to pressing feed.
- Built-in pressure control valve. For exchangeable hexagonal pressing inserts, half-bearing according to DIN 48083.
- Delivery in plastic boxes.

Technical Data:

Pressing force:	130 kN
Pressure:	700 bar
Weight:	5.4 kg
Opening width:	26 mm
Length:	545 mm



Prod.-No.

ALFRA Hydraulic hand pressing unit

03361

Prod.-No. 03361 **Head can be rotated through 320°**

Hexagonal pressing inserts/Cross-sections in mm²

Pressing form half-bearing form, for cable shoe and connectors accord. to DIN 48083


Suitable for pressing units 03360/03380/03361

Tool identic.	Pressing width	Copper	Aluminium	Prod.-No.
8	14	16	-	03365
10	14	25	-	03366
12	12	35	25	03367
14	12	50	35	03368
16	12	70	50	03369
18	12	95	70	03370
20	12	120	-	03371
22	14	150	95 + 120	03372
25	14	185	150	03373
28	14	240	185	03374
32	5	300	240	03376
34	5	-	300	03377



Hexagonal pressing inserts

Hints for hexagonal pressings

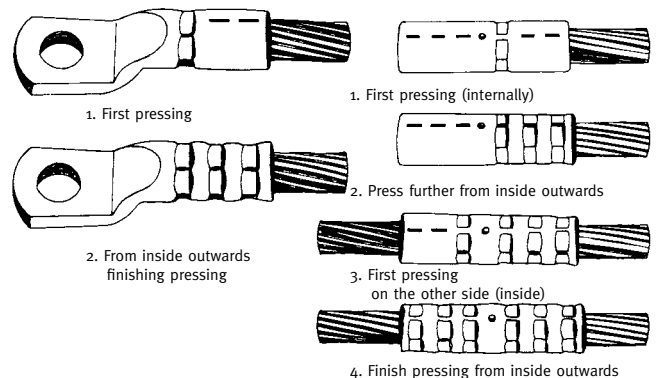



ALFRA HYDRAULIC PRESSING HEADS – 10 - 300 mm²



C-Form for easy handling

- Pressing cable shoes and connectors made of copper and aluminium from 10 – 300 mm².
- Hexagonal pressing inserts, half-bearing form according to DIN 48083.
- Delivery in steel sheet transport boxes.
- The electrohydraulic pump Prod.-No. 02027 or the foot pump 02121 can be used for actuation of both pressing heads.

Technical Data:

Pressing force: 130 kN
 Pressure: 700 bar
 Weight: 3.9 kg
 Opening width: 26 mm
 Length: 245 mm



Prod.-No. 03360

Hydraulic pressing head
 Delivery in steel sheet boxes incl. quick coupling

Prod.-No.
03360

Technical Data:

Pressing force: 130 kN
 Pressure: 700 bar
 Weight: 4.6 kg
Opening width: 38 mm
 Length: 275 mm



Prod.-No. 03380

Hydraulic pressing head
 like Prod.-No. 03360 however **with lateral opening up to 38 mm**

Prod.-No.
03380

Hexagonal pressing inserts/Cross-sections in mm²

Pressing form half-bearing form, for cable shoe and connectors accord. to DIN 48083

Suitable for pressing units 03360/03380/03361

Tool identic.	Pressing width	Copper	Aluminium	Prod.-No.
8	14	16	-	03365
10	14	25	-	03366
12	12	35	25	03367
14	12	50	35	03368
16	12	70	50	03369
18	12	95	70	03370
20	12	120	-	03371
22	14	150	95 + 120	03372
25	14	185	150	03373
28	14	240	185	03374
32	5	300	240	03376
34	5	-	300	03377



Hexagonal pressing inserts